



KALIS 65

RECESSED DOWN LIGHT



KALISE65 is ELTON's Recessed downlight designed with high quality light and superior efficiency. Luminaire body made of die-cast aluminum and PC diffuser for interior architecture lighting.


Features

- > No UV/IR light.
- > Environment friendly, without Mercury or any other hazardous substances.
- > Up to 70% energy saving compared to standard CFL.

Application Areas

It is designed for general lighting applications in office, supermarket, shop, school, hotel, etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

Dimensions

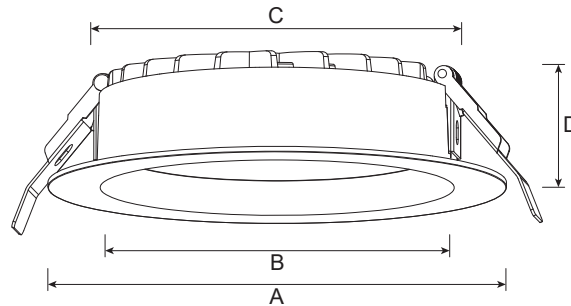

Code	Dimension(mm)				Cut Out
	A	B	C	D	
85	85	61	68	39	Ø70-75
110	110	80	88	38	Ø90-95
120	120	86	100	45	Ø100-110
145	145	104	118	45	Ø120-130
170	170	131	136	45	Ø140-150
190	190	151	155	45	Ø160-170
228	228	180	198	45	Ø220-210

Parameters

Power (W)	Size (ØxH)	Lumens (Non-DIM) (Lm)	Lumens (DIM) (Lm)
7	85x39	510-570	500-560
10	110x38	890-960	880-940
13	110x38	1100-1170	1060-1140
13	120x45	1100-1170	1060-1140
15	145x45	1450-1560	1420-1530
18	170x45	1760-1960	1700-1890
18	190x45	1740-1870	1710-1830
25	190x45	2600-2680	2550-2630
35	190x45	3450-3650	3400-3600
18	228x45	1650-1890	1620-1860
25	228x45	2420-2600	2370-2550
35	228x45	3500-3780	3450-3730

AC Input Range	200-240 V (50/60Hz)
LED	SMD
CRI	>80
Installation	Recessed
CCT Range	3000K, 4000K, 5000K, 6000K
Beam Angle	90°
Protection Class	Class II
Lifetime(Hr)	50,000h
Working Temp.	-20 to +45°C
Storage Temp.	-20 to +65°C
Ingress Protection	IP65
LED Driver	Built -out
Warranty	5 years

Ordering Info.

