



**ELTON**  
**LIGHTING**

*Lighting your ways..*

# BULLET

WEATHERPROOF LUMINAIRE



**IP66** **IK 08** **PF 0.9** **CRI ≥80** **CE** **RoHS**



**BULLET** is ELTON's LED weatherproof. An IP66, dust and moisture resistant LED luminaire. Electronic, fixed output control gear. With medium beam distribution. Class I electrical. Luminaire body and diffuser made of polycarbonate.

## Features


- > Buckle can be adjusted to self-locking anti-thief mode.
- > 6063 aluminium heat sink provides excellent thermal management.
- > High lumen efficiency.
- > IP66 IK08 high protection level.
- > Surface mounted and pendant installation.
- > Emergency version for twin LED module weather-proof light.



## Application Areas

Factory, warehouse, workshop, and other lighting area with high humidity and dusty places .

## Dimensions

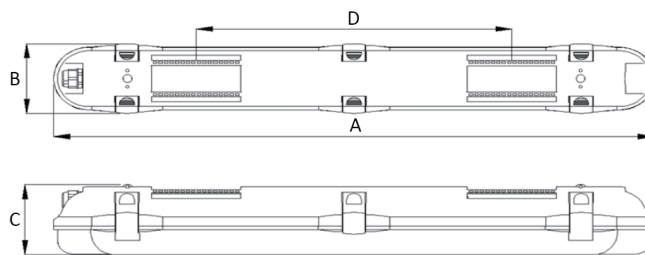

### Measurement

Model	Dimension(mm)				Size(mm)
	A	B	C	D	
664S	664	90	90	350	660x90x90
664T	664	140	90	350	664x140x90
1274S	1274	90	90	900	1274x90x90
1274T	1274	140	90	900	1274x140x90
1574S	1574	90	90	1200	1574x90x90
1574T	1574	140	90	1200	1574x140x90
1837S	1837	90	90	1200	1837x90x90
1837T	1837	140	90	1150	1837x140x90

## Parameters

Wattage	Size Code	Lumen Output (100lm/W) Standard	Lumen Output (130lm/W) Premium
10W	664S	900-1050	1170-1365
19W	664T	1710-2000	2220-2600
19W	1274S	1710-2000	2220-2600
38W	1274T	3420-4000	4450-5200
38W	1574S	3420-4000	4450-5200
57W	1574T	5130-6000	6660-7770
38W	1837S	3420-4000	4450-5440
75W	1837T	6750-7870	8775-10240

AC Input Range	AC200-240V (50/60Hz)
LED	SMD
CRI	>80
Installation	Surface Mount
CCT Range	3000K/4000K/5000K/5700K
Beam Angle	120°
Protection Class	Class I
Lifetime(Hr)	50,000h
Working Temp.	-20 to +50°C
Storage Temp.	-20 to +65°C
Glow Wire test	750°C
Driver	Built-In
Ingress Protection	IP66
Impact Resistance	IK08
Finish	Grey

## Ordering Info.

