






LED BOLLARD LIGHT





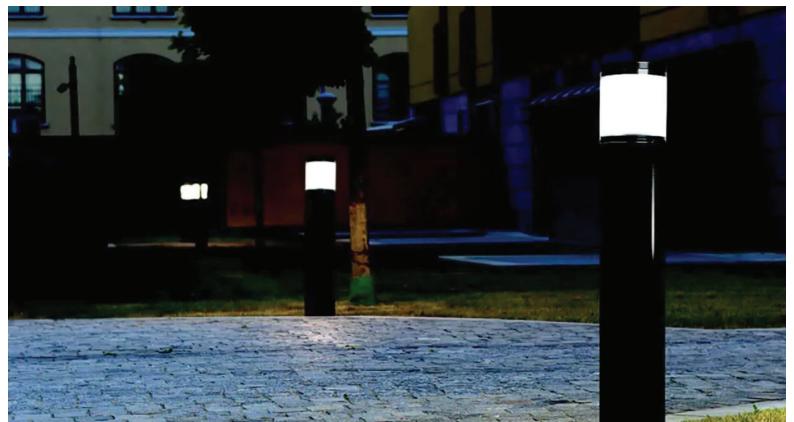



MARKER is ELT IN's bollard. Extending our landscape range, these bollards come in a variety of sizes and shapes with various options. The versatile range of bollards are ideal for any landscape project such as commercial car parks, driveways, gardens and more. A selection of our bollard range have a low glare with a minimum up spill of light making it comfortable on the eye.


Features

- Fast fit installation and Maintenance
- > Die-cast aluminum body.
- > IP65 rating

Typical Application

- > Landscaping
- > Commercial Car Parking
- > Driveways
- > Gardens

Dimensions




Code	Dimension(mm)	
	Α	В
1000	1000	Ø170
800	800	Ø170
500	500	Ø170



Parameters

AC Input Range	AC220-240V (50/60Hz)
Туре	LED
CRI	>80
Installation	Surface Mount
CCT Range	3000К/4000К
Beam Angle	Omni Directional
Protection Class	Class I
Lumen	90lm/W
Working Temp.	-20 to +50°C
Storage Temp.	-20 to +65°C
Driver	Built-In
Ingress Protection	IP65
Impact Resistance	IK08
Finish	Dark Grey
Lifetime(Hr)	50,000h

Ordering Info.

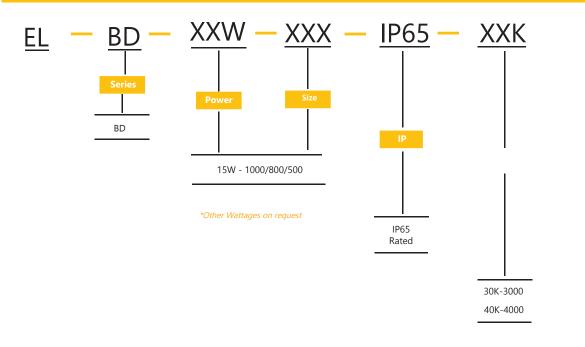

ELTON Lighting. 17 Neals Corner, 2 Bath Road Hounslow TW3 3HJ © 02034909263 @sales@eltonlighting.co.uk @www.eltonlighting.co.uk

The information contained in our datasheets is based on current and relevant information at the time of original issue or publication. We constantly strive to improve and upgrade our products from a performance, materials and quality perspective. This may result in a difference between actual product performance and that shown on data sheets, warrantees are based on actual delivered product performance.