



ELTON

L I G H T I N G

Lighting your ways..

LENTUS AL

WEATHERPROOF LUMINAIRE



LENTUS AL is ELTON's LED weatherproof with aluminium housing. An IP66, dust, moisture and impact resistant maintenance-free LED luminaire. Electronic, fixed output control gear. With wide beam distribution. Class I electrical. Luminaire body made of aluminium and diffuser made of polycarbonate.



Features



SS 304 PG13.5



Aluminium Housing




Hexagon Screws

Application Areas

Factory, warehouse, workshop, and other lighting area with high humidity and dusty areas .

Dimensions

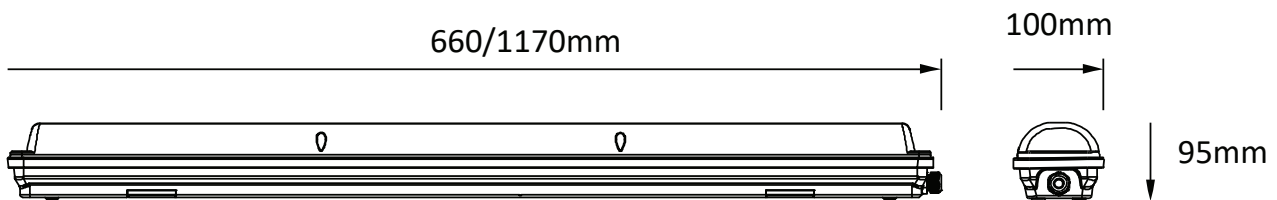


Parameters

Length	Power (W)	Lumens	Input Range	AC 220 – 240V
660mm	25W	3250lm	Frequency	50/60Hz
660mm	35W	4550lm	Housing	Aluminium
1170mm	35W	4550lm	Diffuser	Polycarbonate
1170mm	50W	6500lm	Light Source	SMD LED (Everlight/LG)
1170mm	65W	8450lm	LED Driver	Philips/Tridonic/Osram
			Power Factor	>0.95
			Beam Angle	120°
			CRI	>80
			Ambient Temp.	-20 to +50°C
			Protection	IP66 & IK10
			Warranty	5 years
			Function (Optional)	Sensor/Emergency

Notes:

- Above lumens based on 4000K Ra : 80
- All values in +25°C ambient temperature
- Luminous flux tolerance +/-5%, power tolerance +/-5%.

Photometric Data

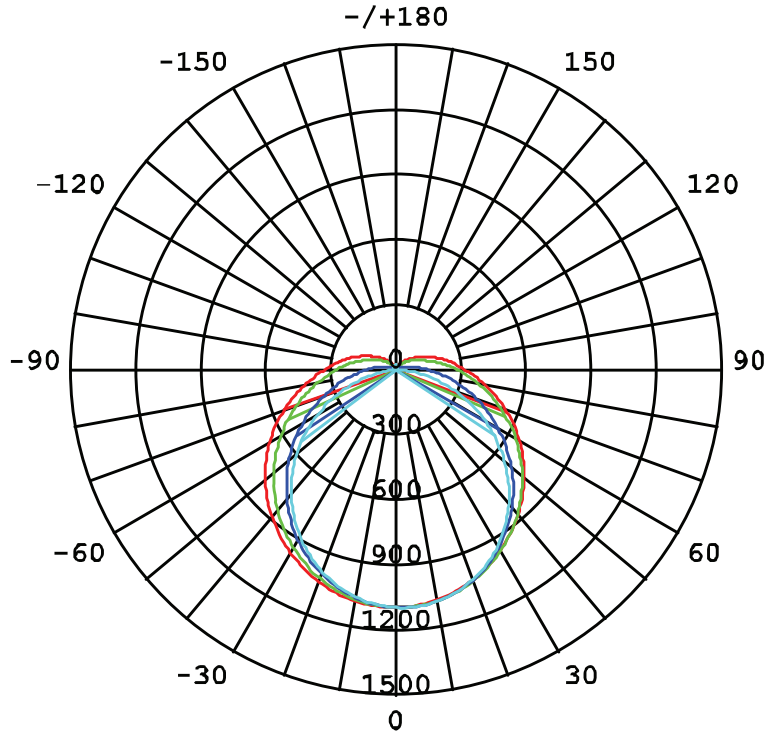

Ordering Info.

