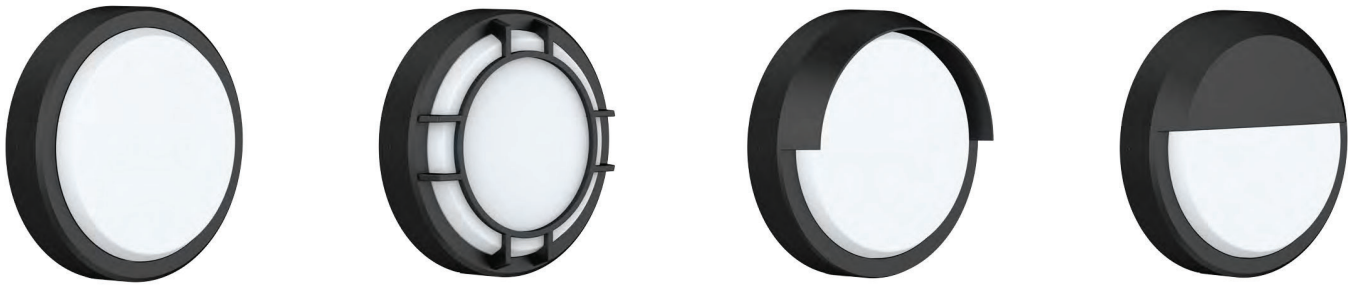




KNOX

LED BULKHEAD LUMINAIRE



IP65

PF 0.9

CRI ≥80

CE



KNOX is ELTON's Wall Mounted Bulkhead luminaire designed with high quality housing made of Die-casting Aluminium and polycarbonate opal diffuser.














Features

- > Vandal proof design.
- > Four type of frames.
- > Environment friendly, without Mercury or any other hazardous substances.
- > Function: Adjustable sensor, interchangeable CCT+adjustable power, emergency.
- > Dimming Controls: Triac dimming, DALI dimming, 0-10V dimming.

Application Areas

Indoor (Staircase, Balcony)/Outdoor (Roof, Wall etc..)

Dimensions

Model				Diameter (mm)	Height (mm)	Type Code
				250	63	R
				300	63	
				250	68	C
				300	68	
				250	83	E
				300	83	
				250	67	W
				300	67	

Parameters

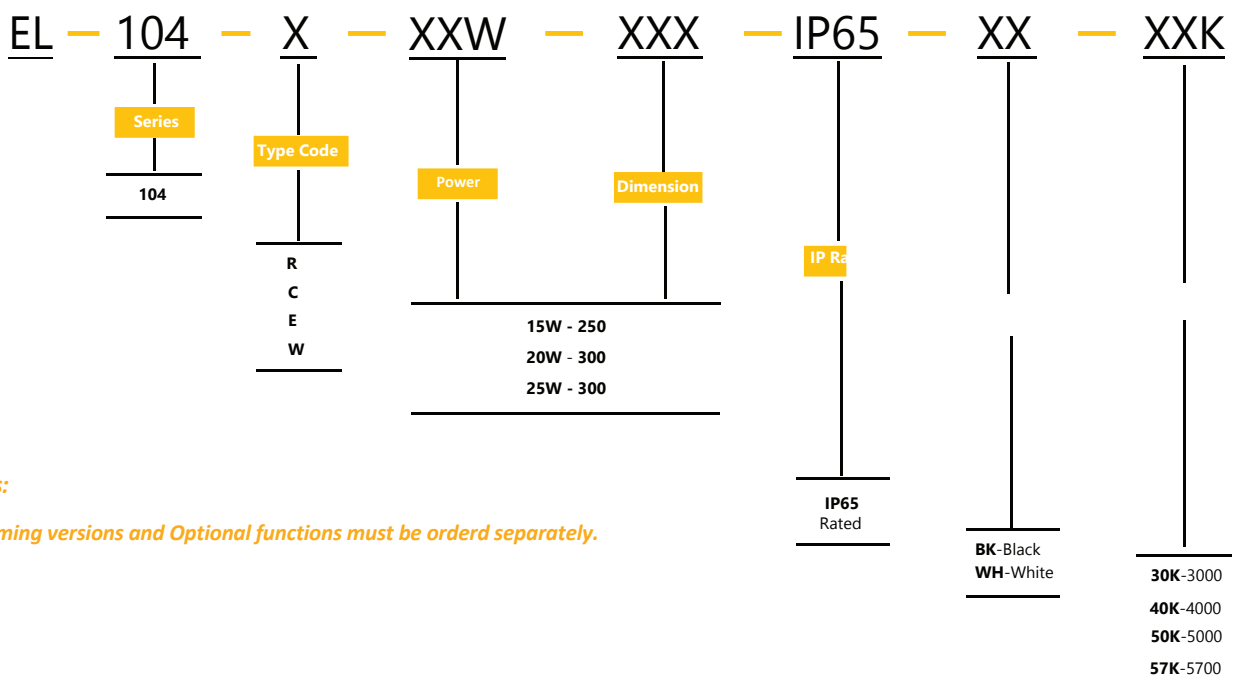
Diameter	Power (W)	Type Code	Lumens
250mm	15W	R	1550-1750
300mm	20W	R	2050-2350
300mm	25W	R	2550-2950
250mm	15W	C	1300-1500
300mm	20W	C	1750-2100
300mm	25W	C	1800-2150
250mm	15W	E	1400-1600
300mm	20W	E	1900-2150
300mm	25W	E	1950-2150
250mm	15W	W	1000-1100
300mm	20W	W	1300-1400
300mm	25W	W	1800-1900

Input Range	AC 200 – 240V
Frequency	50/60Hz
Installation	Surface Mounting
Housing	Die-Cast Aluminum
Diffuser	Polycarbonate Opal Diffuser
Light Source	SMD LED 2835
LED Driver	Built in
Power Factor	>0.90
Beam Angle	120°
CRI	>80
Ambient Temp.	-20 to +50°C
Storage Temp.	-30 to +65°C
Lifetime (hr)	50,000 hours at 25°C
Protection	IP65 & IK10
Dimming Option	Triac/DALI/0-10V
Finish	BLACK RAL 9005/WHITE RAL 9016
Function (Optional)	Sensor/Emergency/CCT Changeable/Wattage Changeable

Notes:

- Above lumen varies according to CCT
- Luminous flux tolerance +/-5%, power tolerance +/-5%.

Ordering Info.



Notes:

- Dimming versions and Optional functions must be ordered separately.